




MacBook Pro 13" Retina Display Late 2013 Battery Connector Replacement

Prereq only

Written By: Sam Lionheart

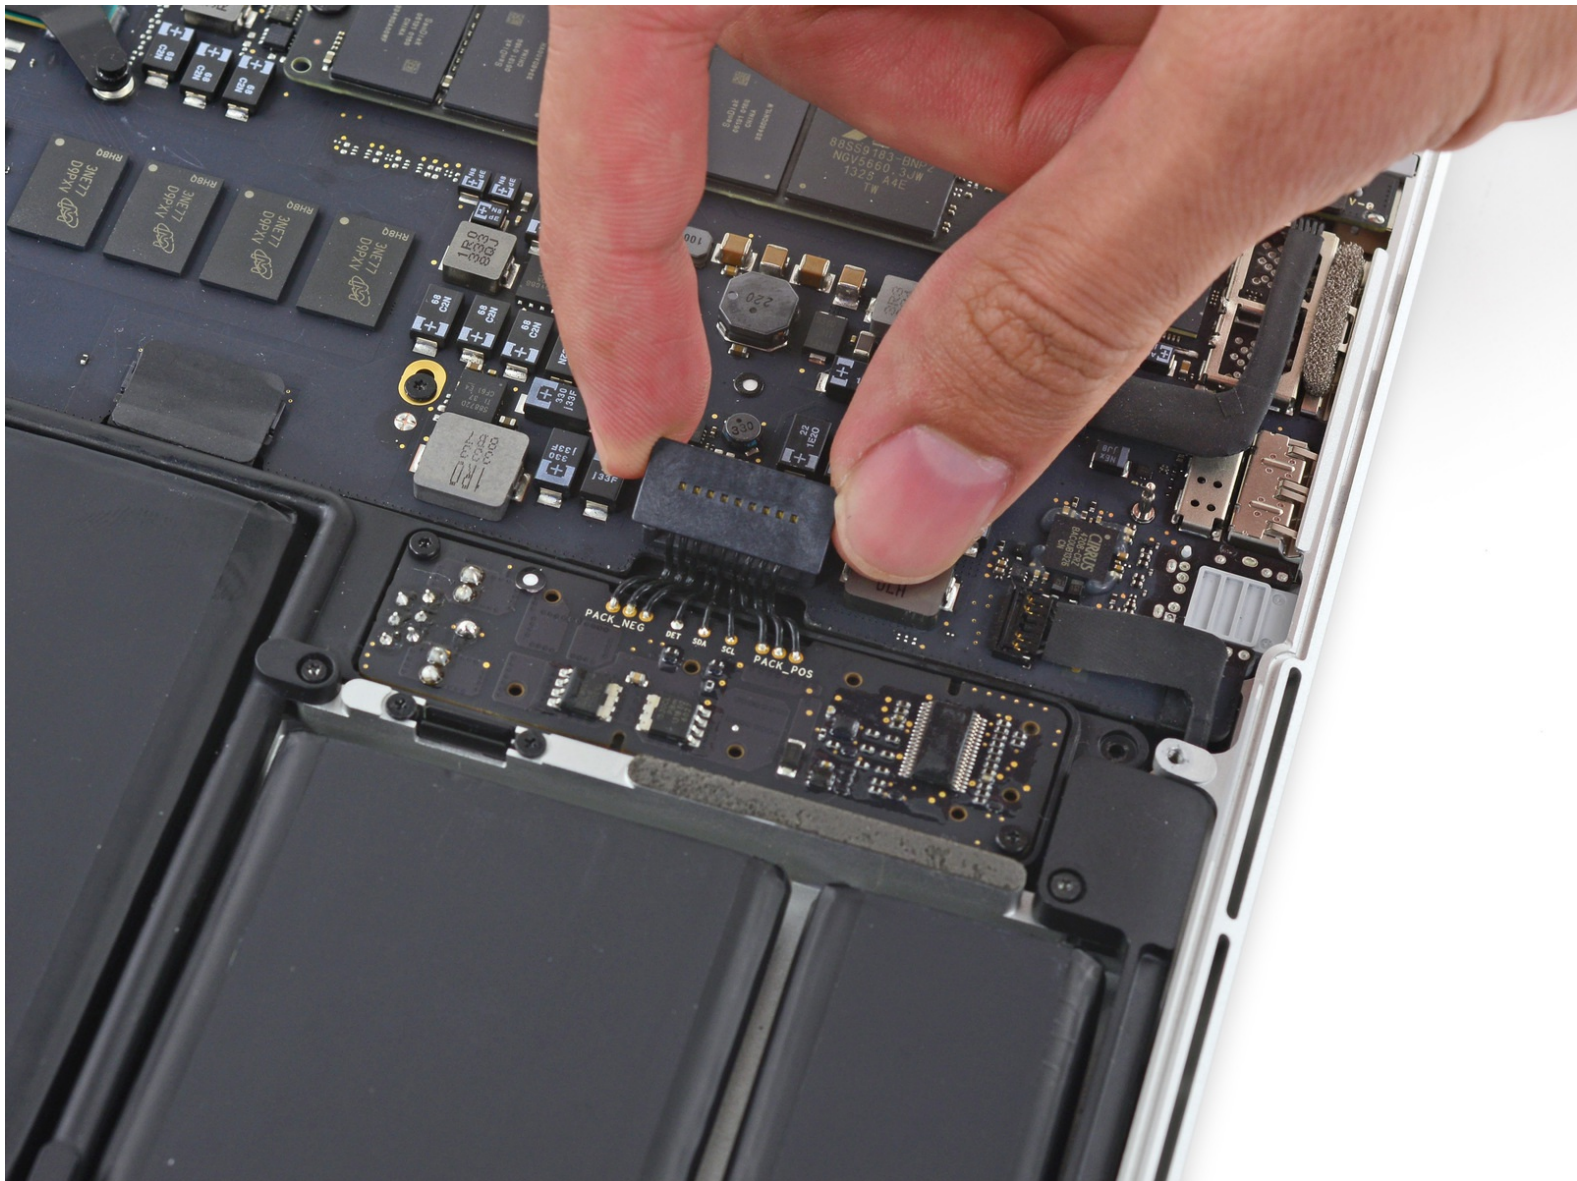

INTRODUCTION


Prereq to disconnect the battery



TOOLS:



- [Spudger](#) (1)
-

Step 1 — Battery Connector

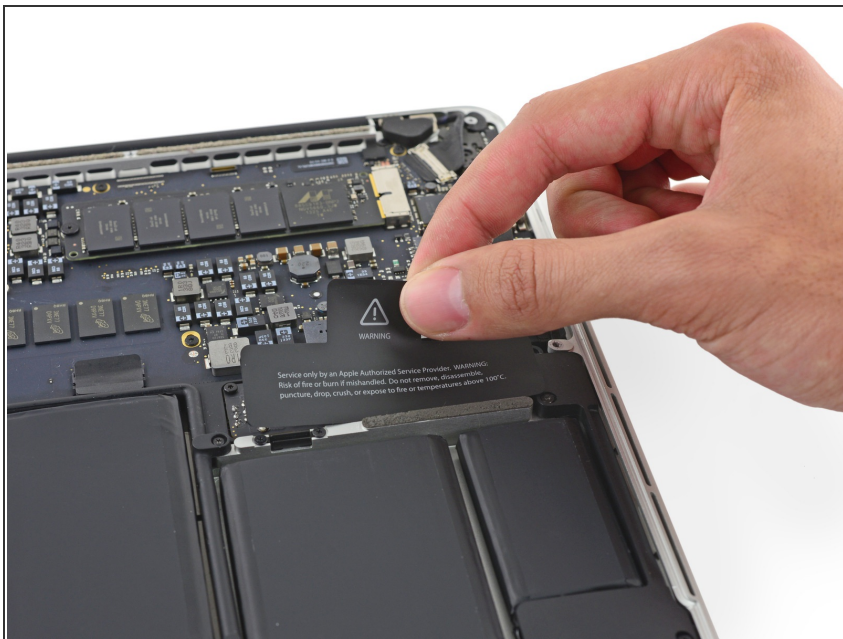

ⓘ If necessary, remove the plastic cover adhered to the battery contact board.


Step 2

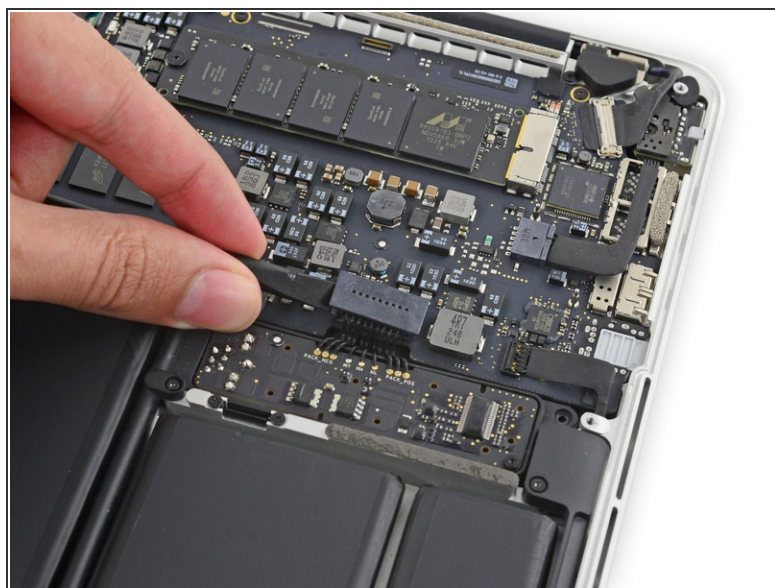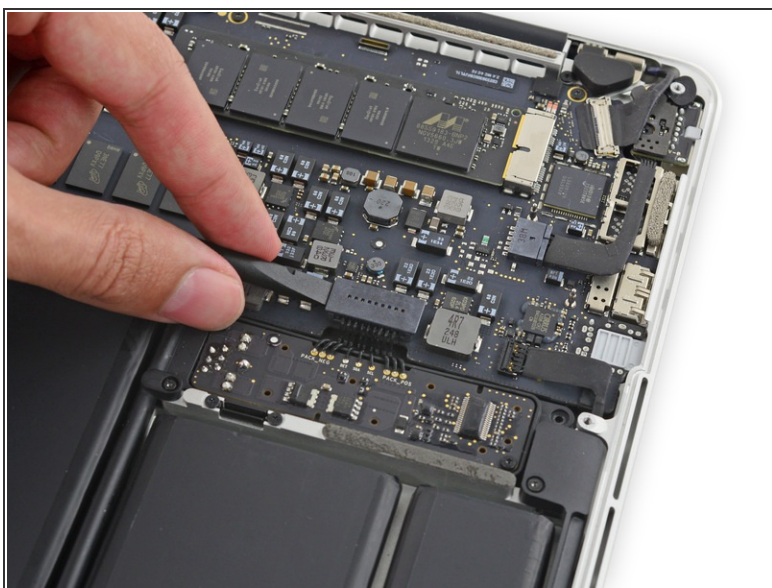

- Use the flat end of a spudger to lift the battery connector straight up out of its socket on the logic board.

⚠ Be sure you lift up only on the connector itself, **not** the socket, or you risk permanent damage to the logic board.

Step 3

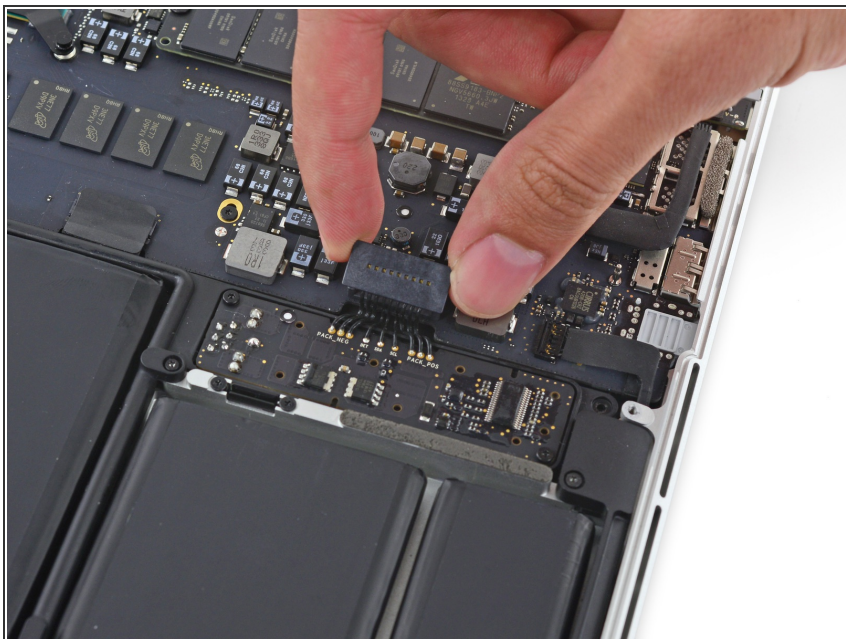

- ✦ Bend the battery connector up out of the way to prevent accidental contact with its socket during your repair.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 06:11:03 AM.